

S8081 Series Standard Damper Actuators

This damper actuator is designed for damper control in HVAC systems.

◆ Features

- Torque: 30Nm, 40Nm
- Nominal Voltage: AC/DC 24V and AC 230V
- Control Method: 2 point/3 point

◆ Order Code

S8081-XX D X/X

Supply Voltage: AC/DC 24V and AC 230V


Auxiliary Switches F: 2 SPDT
N: no SPDT

Control Type: D(Digital) on/off

Torque: 30Nm, 40Nm



◆ S8081-30/40D Technical Specifications

Items	S8081-30DN(F)	S8081-40DN(F)
Torque (Nm)	30Nm	40Nm
Stopping Torque (Nm)	>30Nm	>40Nm
Damper Size (m ²)	6m ²	8m ²
Running Time (sec)	75s	100s
Nominal Voltage (V)	AC/DC 24V; AC 230V 50/60Hz	
Supply Voltage Range	AC/DC 19.2-28.8V; AC 85-265V	
Power Consumption (on)	5W(24V); 5W(230V)	
Power Consumption (off)	0.7W(24V); 1W(230V)	
Reactive Power (VA)	7	
Weight (Kg)	1.4Kg	
Control Signal	2 point/3 point	
Rotation Angle	0~90°(Max 93°)	
Rotation Direction	L/R switch	
Positional Feedback	None or 2 Auxiliary Switches	
Life Cycle	≥70000	
Sound Power Level	≤45dB	
Electrical Protection Class	II/III	
Ingress Protection	IP54	
Ambient Temperature	-30~+50°C	
Ambient Humidity	5~95% RH	
Storage Temperature	-40~+80°C	
Shaft Diameter	 12-26.7 mm, pair with Shaft Block 6 for smaller shafts	
Accessories	1m cable	
Compliance	CE, UKCA, UL, EAC, RoHS certificates	

This damper actuator is designed for damper control in HVAC systems.

◆ Features

- Torque : 30Nm, 40Nm
- Nominal Voltage : AC/DC 24V
- Control Method : 0(2)-10V or 0(4)-20mA Analogue

◆ Order Code

S8081-XXAX/X

- Supply Voltage: AC/DC 24V
- Auxiliary Switches F: 2 SPDT
N: no SPDT
- Control Type: A(Analogue) Modulating
- Torque: 30Nm, 40Nm




◆ S8081-30/40A Technical Specifications





Items	S8081-30AN(F)	S8081-40AN(F)
Torque (Nm)	30Nm	40Nm
Stopping Torque (Nm)	>30Nm	>40Nm
Damper Size (m ²)	6m ²	8m ²
Running Time (sec)	75s	100s
Nominal Voltage (V)	AC/DC 24V 50/60Hz	
Supply Voltage Range	AC/DC 19.2-28.8V	
Power Consumption (on)	5W	
Power Consumption (off)	0.7W	
Reactive Power (VA)	7	
Weight (Kg)	1.4Kg	
Control Signal	0(2)-10V or 0(4)-20mA Analogue	
Rotation Angle	0~90°(Max 93°)	
Rotation Direction	L/R switch	
Positional Feedback	None or 2 Auxiliary Switches	
Life Cycle	≥70000	
Sound Power Level	≤45dB	
Electrical Protection Class	III	
Ingress Protection	IP54	
Ambient Temperature	-30~+50°C	
Ambient Humidity	5~95% RH	
Storage Temperature	-40~+80°C	
Shaft Diameter	 12-26.7 mm, pair with Shaft Block 6 for smaller shafts	
Accessories	1m cable	
Compliance	CE, UKCA, UL, EAC, RoHS certificates	

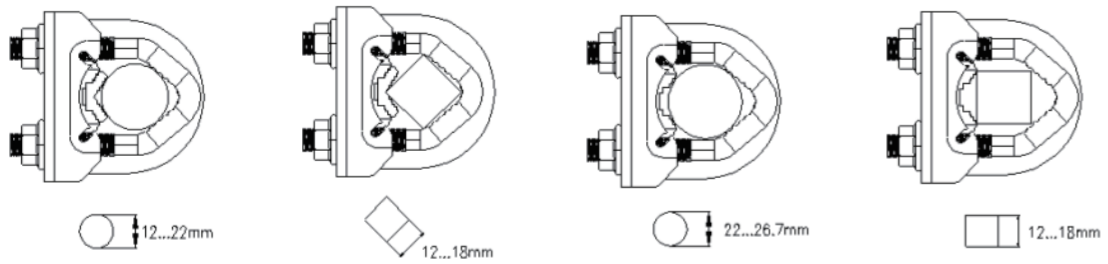S8081 Series Standard Damper Actuators



◆ S8081-30/40 Shaft Dimensions




Unit: mm

Shaft	Length			
	≥ 52	22.....26.7	≥ 12	≤ 26.7

◆ S8081-30/40 Dimensions unit (mm)

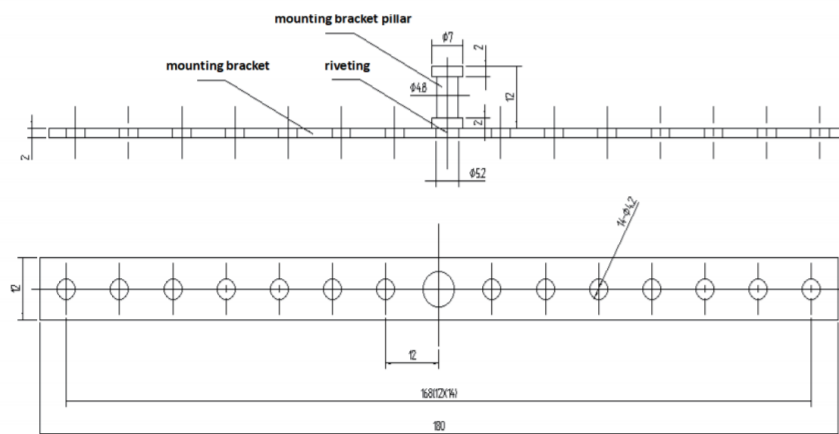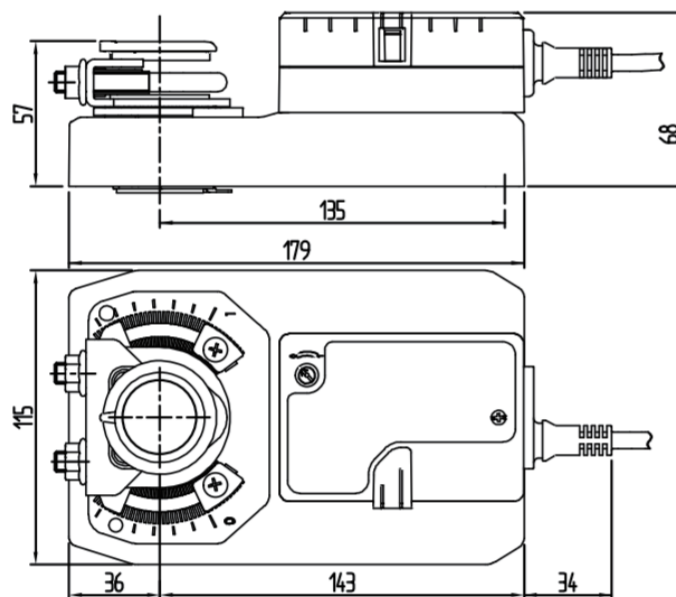


◆ S8081 Wiring Diagrams

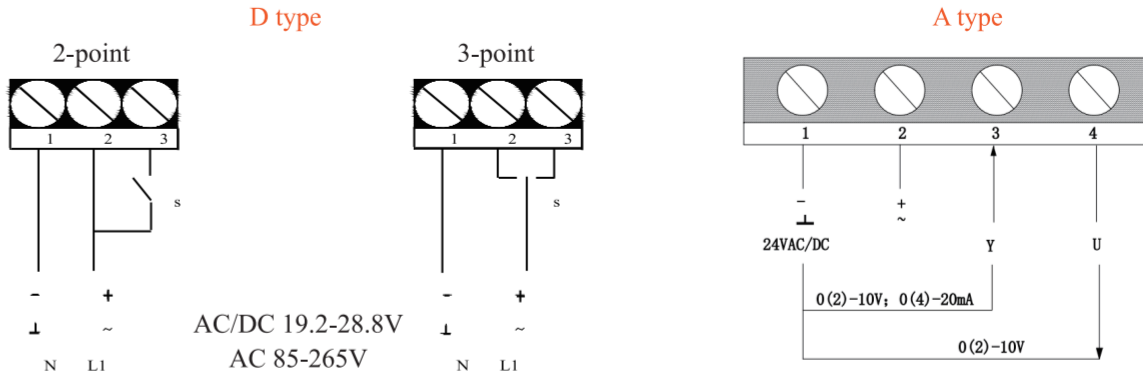


◆ A Type Control Signal and Input Impedance Selections


According to the needs of the site, the position of the SW1 DIP switch in the circuit board can be adjusted to achieve the conversion of control signal and feedback signal, see the figure below for details

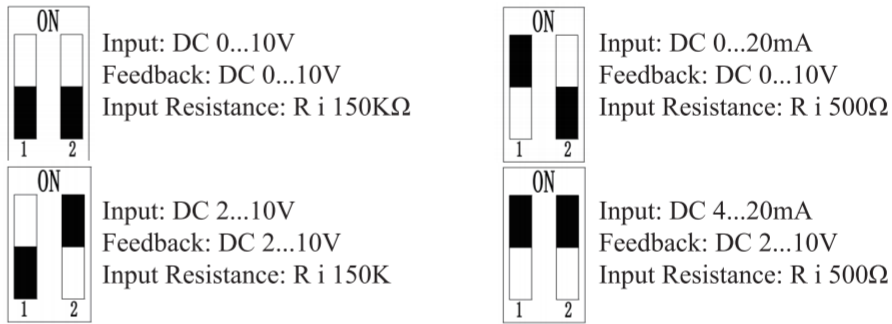

◆ Direction of Rotation

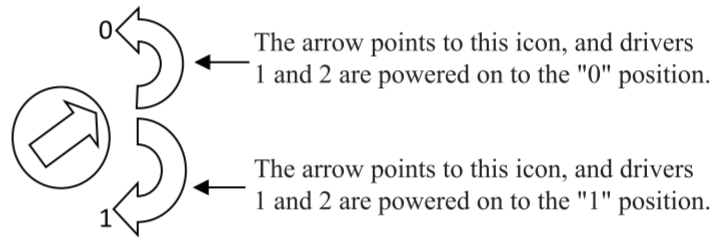

◆ Auxiliary Switch Diagrams

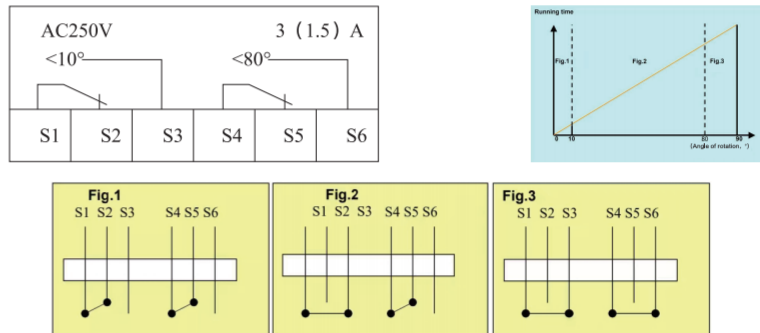

1. The installation must be carried out by personnel who have received relevant training or relevant work experience. During the installation process, be careful not to operate with power on, and install the actuator according to the regulations.
2. The device contains electrical and electronic accessories, so it is prohibited to dispose of it as ordinary garbage after the product is scrapped. The disposal method should comply with the regulations and requirements of the local government.